


SINGLEstream™ 10 Gigabit Link Aggregation Tap with 4 - XFP Monitoring Ports

SS-1206-10G Models

**Multiple Tool Access
and Full-Duplex
Visibility at 10G for
Single Interface
Monitoring Solutions**



10 Gigabit Full Duplex Aggregation



While traditional taps might enable full-duplex monitoring of all traffic on a network link, they transmit the data to the connected monitoring device in two separate half-duplex streams (one for Tx and one for Rx). Not only does this require the monitoring device to have two network interface cards, it also requires that the device be capable of combining and processing both streams of data in order to monitor both sides of the conversation. Not all monitoring systems, including the most popular software solutions, have the required hardware to aggregate traffic.

The SINGLEstream™ 10 Gigabit Link Aggregation Tap combines both directions of a 10 Gigabit full duplex data stream and allows any connected monitoring device, including those with only one NIC, to receive a copy of all the data - even in a single trace file.

Data Filtering




Instead of tools attempting to keep up with high-speed aggregated traffic streams, the SS-1206-10G-F (with data filtering) model provides the option of applying filters to the data to increase tool efficiency and eliminate port oversubscription. Line-rate hardware filtering on each port allows you to customize and streamline the amount and type of data each connected monitoring tool receives. Because they are receiving only traffic of interest, tools run faster, data is easier to work with, and issues are resolved quicker. Filters include IP and MAC ranges, VLAN, frame, port number, protocol type, even customizable offsets in the packet header.

Totally Passive and Power Fault Tolerant



Fiber taps are completely passive devices and are not a point of failure on the network. Even if power is lost to the tap, the network traffic will not be affected. If one side of the link fails for any reason, the device on the other side of the link will recognize this outage immediately, so routers and switches can engage redundant protocols and failover systems.

Dual Stream Mode



For dual-receive capable tools or times when there is no substitute for full line rate data capture (e.g. network attacks), the SINGLEstream™ can be configured to work exactly like a traditional full duplex tap, providing a copy of full-rate Gigabit data to connected tools in two separate streams (Tx and Rx).

Any-to-Any



Any of the SS-1206-10G's four (4) any-to-any ports can be configured as input (network) or output (monitoring) ports on the fly through easy to use command line interface (CLI). Any monitoring port can receive traffic from any of the other ports, eliminating the need for network managers to change complex network configurations or move tools around their network. Additionally, the any-to-any ports can be configured to receive data from a switch's SPAN port providing the flexibility of a combined in-line and out-of-band monitoring solution.

Benefits

- 100% Network Uptime - fiber tap is completely passive and won't disrupt the network even if power is lost to the tap
- View entire 10G full-duplex conversations using single-interface monitoring tools
- Decreased reliance on switch resources for network management visibility - eliminate SPAN port contention, oversubscription, and configuration errors
- After installation, deploy tools right away without impacting your production network
- Easily share test access points without maintenance windows or approval
- Single point of deployment and remote management minimizes management expenses and reduces MTTR


Features

- Aggregation - Combine multiple network links or channels into one stream for visibility into complete network conversations
- Regeneration - Send copies of traffic from the tap to multiple connected tools to share data sources
- Any-to-Any - port steer traffic to different tools or turn monitoring ports into additional network ports to receive input from SPAN
- Filtering - Line-rate hardware-based filtering can eliminate port oversubscription and customize data flow to each tool (-F Model)
- Monitoring Ports can be set for full duplex, half duplex, or auto-negotiate
- Stays invisible to the network for enhanced security
- Dual Redundant Power Supplies are hot swappable and load balanced to ensure monitoring uptime



SINGLEstream™ 10 Gigabit Link Aggregation Tap with 4 - XFP Monitoring Ports

SS-1206-10G Models

Internal Port Diagram

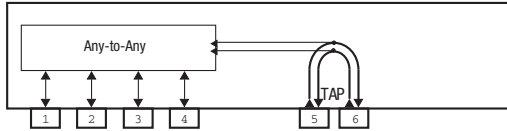

Rear View

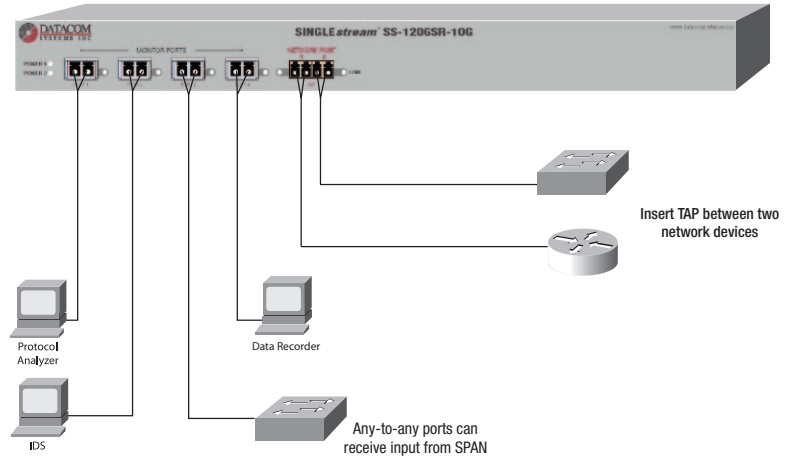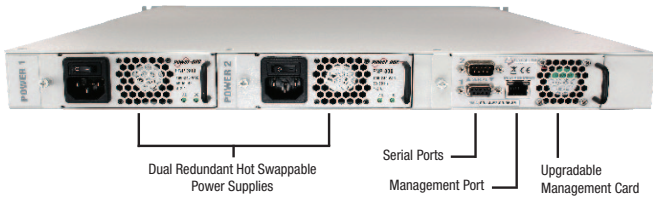

Technical Specifications - SS-1206-10G

PORTS

Network: One (1) Network Tap with Dual LC Connectors
 Monitoring: Four (4) XFP Any-to-Any Ports
 Management: RJ45 @ 100Mbps Full-Duplex
 Serial: DB9F and DB9M

POWER REQUIREMENTS

Hot Swappable Dual Redundant Power Supplies (AC or DC)
 AC: 100-240VAC, 50-60 Hz, 0.4A-0.2A
 DC: 40.5-72.0VDC, 10.0-5.0A

CERTIFICATIONS

CE
 Fully RoHS Compliant

PHYSICAL DIMENSIONS (HXWXD)

1.75 x 19.00 x 21.00 in (4.45 x 48.26 x 53.35 cm)

WEIGHT

13.5 lbs (6.12 kgs)

ENVIRONMENT

Operating Temperature: 0° to 40°C (32° to 104°F)
 Storage Temperature: -30° to 65°C (-22° to 149°F)
 Humidity: 5 to 90% non-condensing

WARRANTY

Standard Model: Two (2) Year Limited Warranty
 Filter Model: One (1) Year Limited Warranty -Support Contract Required

ORDER INFORMATION

Product	Description
SS-1206-10G	SINGLEstream™ 10 Gigabit Link Aggregation Tap with 4 - XFP Monitoring Ports
SS-1206-10G-F	SINGLEstream™ 10 Gigabit Link Aggregation Tap with Data Filtering and 4 - XFP Monitoring Ports
SR*, LR, or ER	SR (Short Range): Multi-mode (50 or 62.5 micron) LR (Long Range): Single mode (9 micron) ER (Extended Range): Single mode (9 micron) *Specify tap diameter when ordering
AC or DC	AC or DC Power
XFP	XFP-SR: 850nm XFP-LR: 1310nm XFP-ER: 1550nm
S-SS-1206-10G-F	One (1) Year Hardware and Software Support
Note:	SFPs and XFPs are Optional Additional Purchase

